




Omniseal Solutions
SAINT-GOBAIN

Space Industry Handbook



Beyond the boundaries of
POSSIBLE


SAINT-GOBAIN

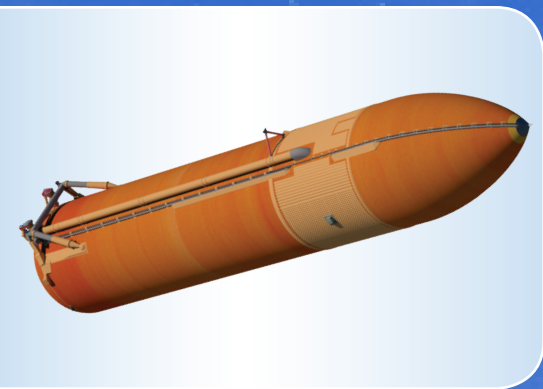

Fuel & Oxidizer Tank


Application: Flange and chamber joints, lining of fuel and oxidizer tank door

- Fluid: Fuel (LH2, Hydrazine, MMH, UDMH, RP-1, etc.) and Oxidizer (LOX, GOX, Peroxide, Nitrogen Tetroxide, Oxygen Difluoride, etc.)
- Temperature: -253°C to +38°C (-424°F to +100°F)
- Pressure: Up to 21 bar (300 psi)
- Sealing: Static face seal

Our Product: Omniseal® seal

Our Key Value:

- Cryogenic sealing of very large diameter areas
- Seal manufacturing not constrained by diameter of the seal ranging up to several feet
- Proven RACO® seal design

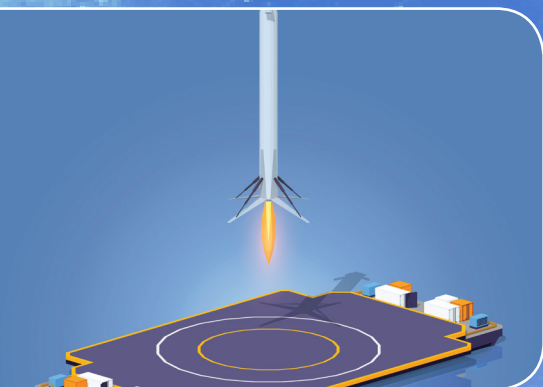

Landing Gear

Application: Landing gear shock-strut

- Fluid: Pressurized gas
- Temperature: Up to +149°C (+300°F)
- Pressure: > 70 bar (1,000 psi)
- Sealing: Dynamic rod/piston seal of dithering and oscillating motion

Our Product: Omniseal® rod/piston seals and Meldin® bushings

Our Key Value:

- Fluid power sealing in high pressure environment
- Lightweight, high-temperature polyimide components replacing metal bushings



Thruster

Application: Hypergolic fluid injection in payload thrusters

- Fluid: Monomethyl hydrazine (MMH) and nitrogen tetroxide (TTO)
- Temperature: +10°C to +38°C (+50°F to +100°F)
- Pressure: 21 bar (300 psi)
- Sealing: Static rod/piston seal

Our Product: Omniseal® seal

Our Key Value:

- Fluid compatibility with corrosive, toxic and difficult to handle hypergolic fluids

Sub-orbital Launch Vehicle

Application: Valves in methane fuel lines

- Fluid: Natural gas
- Temperature: -73°C to +204°C (-100°F to +400°F)
- Pressure: 172 bar (2,800 psi)
- Sealing: Static

Our Product: Omniseal® seal

Our Key Value:

- High pressure sealing in low temperature
- Sealing in a wide temperature range




GOING BEYOND WITH SEALING & MATERIAL SOLUTIONS

Payload & Guidance:

- Spacecraft
- Satellite
- Launch abort system

Structure & Tanks:

- Frame
- Fuel and oxidizer tanks
- Landing gears

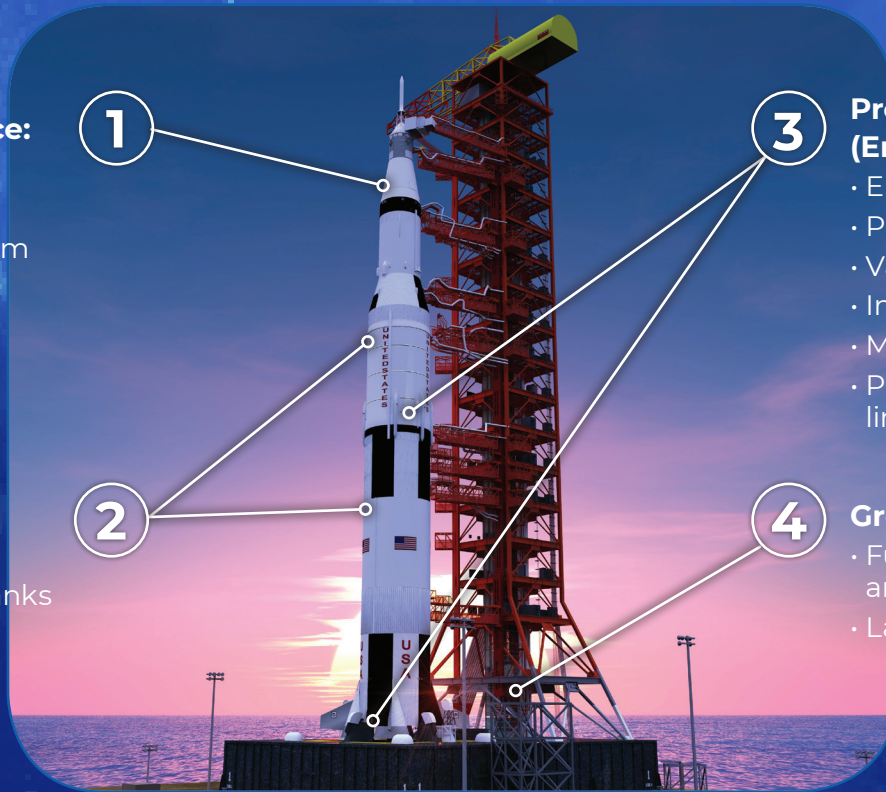

Propulsion

(Engines & Auxiliaries):

- Engines
- Pumps
- Valves
- Injectors
- Manifolds
- Pipes, ducts, flanges, feed lines and actuators

Ground Support System:

- Fuel & oxidizer storage and delivery
- Launch pad

OUR SPACE JOURNEY

From manned and unmanned space programs to countless other sub-orbital, orbital and outer space programs...

From our Omniseal®, RACO® and TEC Ring seals with Fluorocarbon Company, Furon and now Omniseal Solutions™.




Project Mercury
(1959-1963)



Project Gemini
(1963-1966)



Apollo Program
(1961-1972)



Viking Program
(1975)



Space Shuttle
Program
(1981-2011)



Mars Exploration
Program (1993-ongoing)



Space Launch
System SLS
(2011-ongoing)

Supporting all major space projects from civil to military to commercial and emergent space.

Proven in the Past...

Building upon three initial unique designs (Omniseal®, RACO® and TEC Ring seals), we have been recognized as a leading designer and manufacturer of high-performance spring-energized seals that provide improved sealing performance over soft elastomeric seals and hard metal gaskets in applications involving cryogenic liquid propellants in various rocket engine programs. Our Meldin® thermoset polyimide material is ideal as finished machined components in high temperature as well as a lightweight and dimensionally stable bushing, piston ring, guide ring, split ring type applications and other custom shapes.

... Prepared for the Future

Valves

Application: Valves in flow control and fluid handling

- POGO suppression, engine control, anti-blowout, isolation, throttle, cryogenic, OIV, FIV, ball valves, butterfly valves, relief valves, check valves, main valves, etc.

Application conditions:

- Fluid: Fuels and oxidizers, hypergolic fuels, etc.
- Temperature: Cryogenic to a few hundred degrees F
- Pressure: Up to a few thousand psi
- Sealing: Reciprocating rod/shaft seal and static face seal

Our Product: Omniseal® seal

Our Key Value:

- Cryogenic sealing
- Low friction and wear in oscillating/vibrating environments
- Seal design prevents seal blowout

Fluid Transfer Line

Application: Slip joint ducts and fittings

- Fluid: Helium, O₂, H₂, N₂, etc.
- Temperature: -112°C to +213°C (-170°F to +416°F)
- Pressure: 55 bar (800 psi)
- Sealing: Static seat seal, dynamic rod/piston seal and bushing

Our Product: Omniseal® seal with guide rings and Meldin® components

Our Key Value:

- Able to withstand oscillation and vibrations
- Lightweight polyimide replacing metal bushing

Space Exploration Vehicle

Application: Analytical chemistry equipment

- Fluid: Martian atmosphere, Sulfur Hexafluoride (SF₆)
- Temperature: -130°C to +120°C (-202°F to +248°F)
- Pressure: Up to 1 bar (14 psi)
- Sealing: Static rod/shaft seal

Our Product: Omniseal® seal and Rulon® ball bearings

Our Key Value:

- Sealing over a wide temperature range
- Wear and abrasion resistance in harsh sand/dust environment

Rocket Motor



Application: Port to tube fitting

- Fluid: Hypergolic and cryogenic
- Temperature: -240°C to +260°C (-420°F to +500°F)
- Pressure: 172 bar (2,500 psi)
- Sealing: Static face

Our Product: Metal Boss Seal

Our Key Value:

- Temperature capability from -269°C to +816°C (-453°F to +1,500°F)
- PTFE coated metal jacket and crush ring for robust sealing

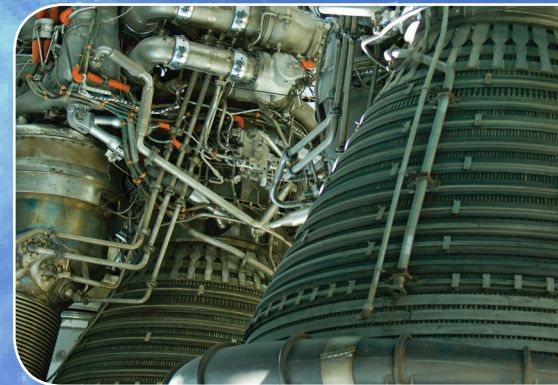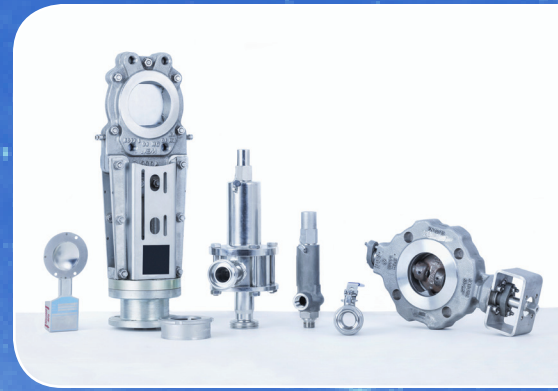

OUR ADDED VALUE IN SPACE APPLICATIONS

Cryogenic Sealing

- Omniseal® spring-energized seals provide excellent cryogenic sealing ($T < -150^{\circ}\text{C}/-238^{\circ}\text{F}$)
- Omniseal® metal C-Seals and spring-energized C-Seals are available for extremely tight leakage requirements or thermal cycling to high temperatures ($> +300^{\circ}\text{C}/+572^{\circ}\text{F}$)



Chemical Compatibility

- Omniseal® seals are inert to almost all chemicals and compatible with aggressive and corrosive fuels without swelling
- LOX cleaning and clean room assembly



Low Friction and Wear & Light Weight

- Seals offer the lowest CoF
- Excellent wear characteristics
- Excellent in oscillating/vibrating and high pressure engine environments
- Light weight compared to other seal options and bushings



Proven Pedigree

- Numerous historical launch programs
- RACO® seal referenced in NASA Reliability Preferred Practices: PRACTICE NO. PD-ED-1208, Static Cryogenic Seals for Launch Vehicles



Solutions

Main Features

OMNISEAL® POLYMERS

High-Performance
Spring-Energized Seals

High-Performance PTFE
Rotary Shaft Seals

- Temperatures from -210°C to $+316^{\circ}\text{C}$ (-346°F to $+600^{\circ}\text{F}$).
- Pressure: Vacuum up to 3,448 bar (50,000 psi).
- Low and controlled friction.
- Broad chemical resistance.

- Temperatures from -53°C to $+232^{\circ}\text{C}$ (-65°F to $+450^{\circ}\text{F}$).
- Shaft speed in excess of 36 m/s (7,000 fpm).
- Pressures up to 35 bar (508 psi).

RULON® FLUOROPOLYMERS

High-Performance
Fluoropolymer Compounds

- Temperatures from -268°C to $+316^{\circ}\text{C}$ (-450°F to $+600^{\circ}\text{F}$).
- Low friction, high wear life and broad chemical resistance.

MELDIN® POLYIMIDES

High-Performance Thermoset
Polyimide Materials


- Temperatures from cryogenic through $+316^{\circ}\text{C}$ ($+600^{\circ}\text{F}$), intermittently up to $+482^{\circ}\text{C}$ ($+900^{\circ}\text{F}$).
- Superior strength and rigidity combined with self-lubrication properties.

OMNISEAL® METALS

High-Performance Metal Seals

- Temperatures from cryogenic up to $+1,093^{\circ}\text{C}$ ($+2,000^{\circ}\text{F}$).
- From ultra-high vacuum to 6,894 bar (100,000 psi).
- Leakage performances as low as 10^{-10} sccs with GHe

ONE GLOBAL TEAM... A DEDICATED CUSTOMER FOCUS

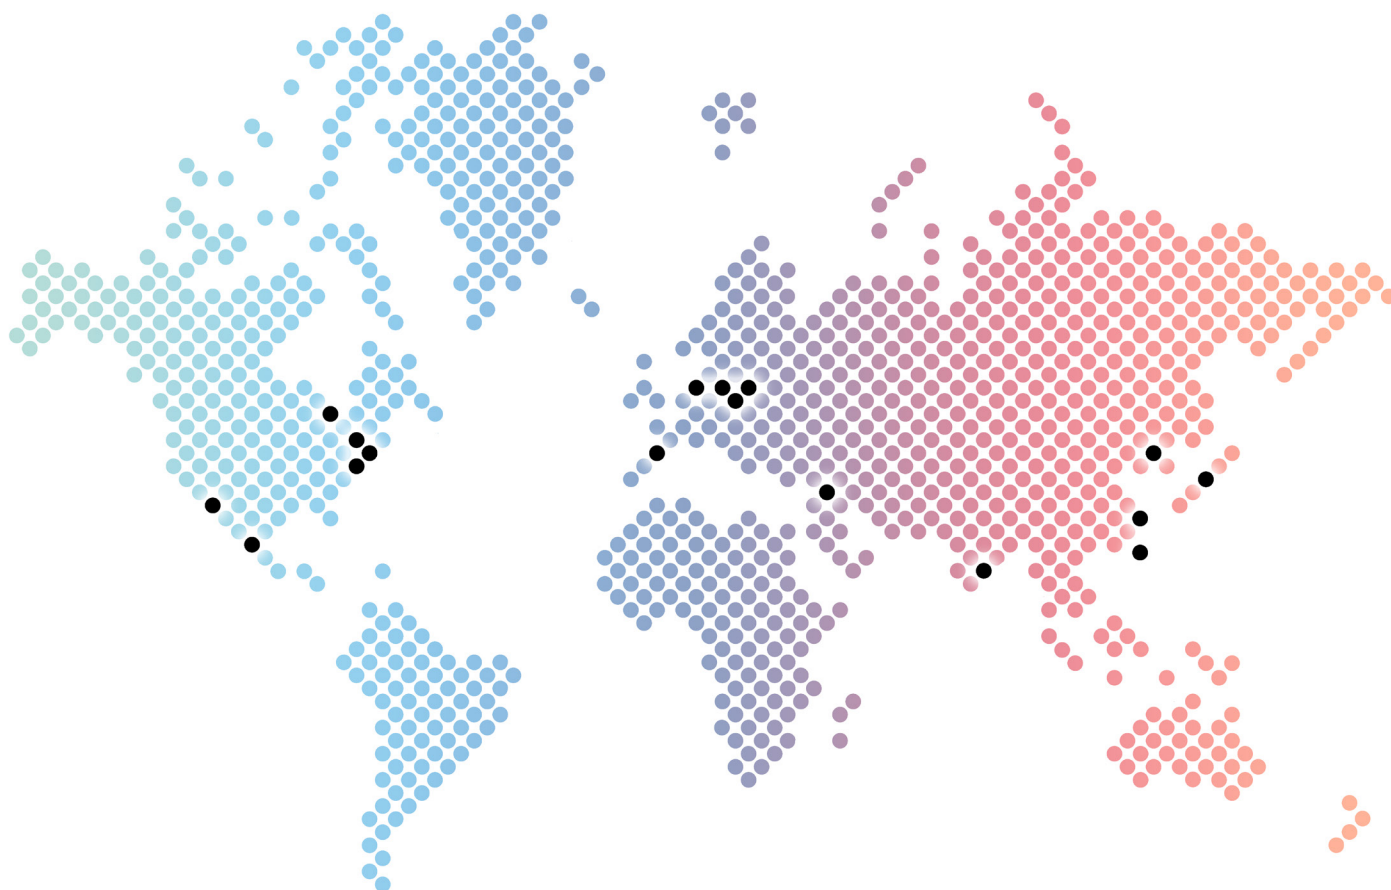

GLOBAL & LOCAL PRESENCE

With 17 manufacturing facilities in 10 different countries, Omniseal Solutions™ is a diverse group that is committed to being customer centric.

Contact our team of experts for more information. We have local resources to support you!

- **Americas:** Garden Grove, CA, USA; Bristol, RI, USA; Orange, CT, USA; Cleveland, OH, USA; Northboro, MA; Saltillo, MX
- **Europe:** Kontich, Belgium; Mechelen, Belgium; Vimercate, IT; La Rioja, Spain; Kolo, Poland; Willich, Germany
- **Asia:** Shanghai, China; Bangalore & Chennai, India; Suwa & Tokyo, Japan; Seoul & Incheon, South Korea; Taipei, Taiwan

help@omniseal-solutions.com
www.omniseal-solutions.com

Omniseal®, Rulon®, Meldin® and Fluoroloy® are registered trademarks of Saint-Gobain Performance Plastics Corporation.

Limited Warranty: For a period of 6 months from the date of first sale, Saint-Gobain Performance Plastics Corporation warrants this product(s) to be free from defects in manufacturing. Our only obligation will be to provide replacement product for any portion proving defective, or at our option, to refund the purchase price thereof. User assumes all other risks, if any, including the risk of injury, loss or damage, whether direct or consequential, arising out of the use, misuse, or inability to use this product(s). SAINT-GOBAIN PERFORMANCE PLASTICS DISCLAIMS ANY AND ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

NOTE: Omniseal Solutions™ and Saint-Gobain Performance Plastics Corporation does not assume any responsibility or liability for any advice furnished by it, or for the performance or results of any installation or use of the product(s) or of any final product into which the product(s) may be incorporated by the purchaser and/or user. The purchaser and/or user should perform its own tests to determine the suitability and fitness of the product(s) for the particular purpose desired in any given situation.